

### E10


### MAIN COMPONENT MASSES

|                                 | METRIC    | IMPERIAL   |
|---------------------------------|-----------|------------|
| WHOLE ASSEMBLY*                 | 17 000 kg | 37 500 lbs |
| UNDERCARRIAGE WITHOUT WORK UNIT | 10 300 kg | 22 700 lbs |
| ONE TRACK PONTOON               | 4 200 kg  | 9 300 lbs  |

\* MAY VARY ACCORDING TO THE ASSEMBLY IN USE.  
FOR UPPER CARRIAGE WEIGHT SEE THE SPECIFICATION OF THE WORK UNIT.

### DIMENSIONS, BIG FLOAT WITHOUT ADDITIONAL PONTOONS

|  | METRIC    | IMPERIAL      |
|--|-----------|---------------|
| MINIMUM TRANSPORT HEIGHT*                            | 3 500 mm  | 11 ft 6 inch  |
| MINIMUM TRANSPORT LENGTH*                            | 10 200 mm | 33 ft 6 inch  |
| TRACK PONTOON LENGTH                                 | 8 200 mm  | 26 ft 11 inch |
| TRANSPORTATION WIDTH                                 | 3 000 mm  | 9 ft 10 inch  |
| OPERATION ON DRY LAND WIDTH                          | 3 500 mm  | 11 ft 6 inch  |
| OPERATION ON SOFT TERRAIN AND IN SHALLOW WATER WIDTH | 4 600 mm  | 15 ft         |
| UPPER CARRIAGE WIDTH*                                | 2 300 mm  | 7 ft 6 inch   |
| TRACK PONTOON WIDTH                                  | 1 350 mm  | 4 ft 5 inch   |
| TRACK PONTOON HEIGHT                                 | 1 440 mm  | 4 ft 9 inch   |

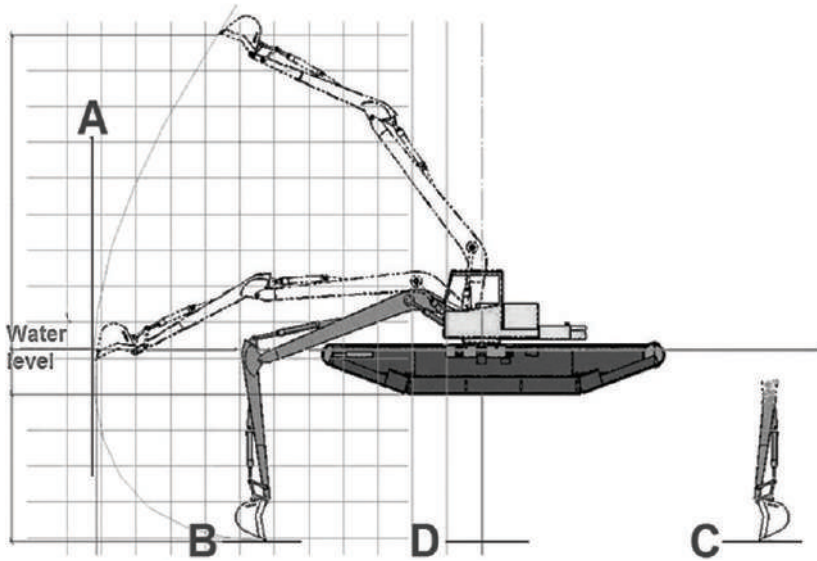

## E10

LONG REACH BOOM

|                                      | METRIC   | IMPERIAL     |
|--------------------------------------|----------|--------------|
| A MAXIMUM REACH, 360°                | 8 000 mm | 26 ft 3 inch |
| B MAXIMUM WORKING DEPTH TO THE FRONT | 4 000 mm | 13 ft        |
| C MAXIMUM WORKING DEPTH TO THE REAR  | 4 000 mm | 13 ft        |
| D MAXIMUM WORKING DEPTH TO THE SIDES | 4 000 mm | 13 ft        |
| STANDARD DREDGING BUCKET SIZE        | 300 l    | 80 gal       |
| STANDARD DREDGING BUCKET WEIGHT      | 180 kg   | 397 lbs      |

\* MAY VARY ACCORDING TO THE ASSEMBLY IN USE.